

PRODUCT CATALOGUE

Vacuum  
induction  
furnaces  
for Industry



**Topcast**  
Engineering



Topcast is a company specialised  
in vacuum induction furnaces design and manufacturing

Competences developed in casting and powder metallurgy, thermal processes, induction heating and power electronics set TOPCAST as an ideal partner for standard and custom applications.

A group of qualified engineers and designers, constantly updated and oriented to the research of enhanced technical solutions, grants a product range definitely at the state of the art. Equipment range includes: VIM, Gas & Water Atomizers for Metal Powders, Vacuum Casting Furnaces, Vacuum Continuous Casting Machines, Metal Granulators and general purpose Induction Furnaces.

Product versatility to meet different production needs, quality design, post-sales assistance and technical consultancy to satisfy particular needs make TOPCAST the best partner to count on in a global competition scenery.

## Vacuum Casting of Metallic Components

Vacuum casting is the process used in lost-wax technique to get a metal part from a wax or resin pattern. The pattern is designed and then built in wax or resin materials by different equipment as CNC, 3D printers, wax injection in rubber or metal molds or even carving manually the wax part. Molten metal can be poured in vacuum either in shell, investment block mold or solid permanent molds. Furnaces and complete foundries setup for casting can be supplied for any application.

In detail, TOPCAST offers the following systems:

- Double Chamber Pressure Vacuum Casting Machines TVCd, designed to meet the more severe needs in lost wax casting production
- Vacuum Centrifugal Casting Machines TCE, robust and versatile machines especially suited for sharp and thin parts with large surfaces, thanks to the high injection rate
- Vacuum Induction Melting furnaces TVM, for pouring in high vacuum, for larger batch capacity and for mass production

## Vacuum Casting of Semi-finished products

Many different equipment are available for obtaining semi-finished products like sheets, rods or tubes.

In detail, TOPCAST offers the following systems:

- Vacuum Continuous Casting Machines TCC, designed with the most up-to-date technologies to produce semi-finished products with the best quality and in the shortest time; our TCC machines have the unique feature of being under vacuum and in a protective atmosphere, and this preventing the oxidation of the metal during melting
- Vacuum Furnaces TVCd-L and TCE-L, used to manufacture high quality semi-finished products, like sheets or rods with difficult profiles, achieved with a fast mold filling rate
- TIP furnaces, designed to manufacture any size of precious metal ingots, from 1 ounce to 400 ounces either in gold or silver. Ingots are obtained by melting pre-weighted grains directly in a graphite mold placed inside the vacuum chamber

## Induction Melting

A large choice of induction melting furnaces for many different uses is offered, from smelting to sampling, from granulation to ingots production. TMF-R equipment are available with capacities up to 1 ton Copper and up to 60 kg Pt with different tilting systems, from electrical to hydraulic. Today, hundreds of TOPCAST induction furnaces are proudly installed worldwide.

## Metal Powder Atomizing & Granulation

TOPCAST manufactures a family of gas and water atomization plants designed to deliver optimized solutions for the most demanding needs in powder metallurgy.

In particular, depending on the final application of the powder, these different systems are available:

- Vacuum Gas Atomizers TMA-g for Additive Manufacturing using SLM (Selective Laser Melting) or EBM (Electron Beam Melting) for precious and nonferrous alloys
- VIGA (Vacuum Induction Gas Atomizers), also under ATEX regulations, for Aluminum, Stainless Steel, Ni-based, MoCrCo powders and more
- EIGA (Electrode Induction Gas Atomizers) under ATEX regulation for Refractory and Reactive metals such as Titanium and more
- Water Atomizers TMA-w for Refining, Soldering, MIM and Sintering applications

Moreover, induction plants to produce nonferrous metal grains, either in air (TMF-G) or in a protective atmosphere (TVCd-G) are produced either for refinery or master alloy production. Plants are usually sold key-in-hands, including equipment for grains drying, sieving, dosing, weighting and final packaging. The high level of automation minimizes the operator work and ensures reliability and safety in handling and storing.



Alloys VS Machines	TVCd	TCE	TVM	TCC	TMF	TMA	TMF-G TVCd-G
Application							
Steel, Cast Iron	●	●	●		●	●	
Inconel, Ni, Co, Cr, Mo alloys		●	●			●	
Ti, TiAl, Zr and Amorphous alloys		●	●			●	
Magnesium	●	●	●				
Platinum, Palladium and PGM alloys		●	●	○	●	●	●
Au, Ag, Cu, Brass and Bronze	●	○	●	●	●	●	●
Al, Si, Zn alloys	●	○	●	●	●	●	●

Suggested ● / Possible ○

## Index

### Vacuum Casting of Metallic Components

Double Chamber Pressure Vacuum Casting Machine TVCd	6
Vacuum Centrifugal Casting Machine TCE	8
Vacuum Induction Melting Machine TVM	10

### Vacuum Casting of Semi-finished Products

Vacuum Furnaces for ingots, sheets and rods TIP, TVCd-L and TCE-L	12
Vacuum Continuous Casting Machine TCC	14

### Induction Melting

Induction Tilting Furnaces TMF-R	16
----------------------------------	----

### Metal Powder Atomizing & Granulation

Vacuum / Argon / Nitrogen Metal Gas Atomizer TMA-g	18
Metal Water Atomizer TMA-w	20
Open System Metal Granulator TMF-G	22
Closed System Metal Granulator TVCd-G	24

### Pre-sintering, Firing & Assay

Induction Generator TGEN	26
Electric Furnace FCC	27

# TVCd | Double chamber pressure over vacuum casting machine

Watch how it work



TVCd is a family of pressure over vacuum casting machines designed to meet the more severe needs in lost wax casting production of aluminum, bronze, steel, magnesium alloys and precious metals. They are often used in connection to a 3d printer for direct casting to get metal parts of complex objects.


This family of machines works with a new, revolutionary double chamber concept. This innovative system gives several advantages compared with the traditional single chamber suction system currently available in the market. In TVCd, melting chamber and flask chamber are completely independent: while casting, the machine can control the metal injection into the mold by applying a differential pressure during pouring. This yields to a faster injection compared to the simply gravity pouring with the benefit to cast items at lower temperature. This will result in better surface finishing and reduced shrinkage porosity of the cast parts.

The casting cycle takes only few minutes and, while the previous flask is cooling in protective gas to avoid oxidation, the next charge can be loaded in the crucible and melted, thus overlapping two cycles for no time waste. The machine is fully automatic, featuring a PC based monitoring system for process parameters acquisition and production data management, with easy editing of casting programs suitable for many kind of alloy.

The machine comes in standard models, for laboratories and small foundries, or in XL and XXL models, for medium and large foundries.

This revolutionary machine is the synthesis of the most advanced engineering and years of experience in casting that TOPCAST will bring in your factory.

Examples

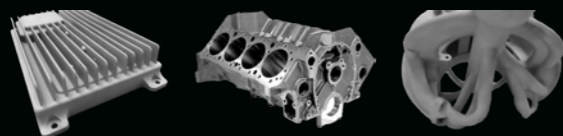

Model TVC35d-XL



Model



## Technology, features, technical data

### Gas Wash Procedure

- Crucible loading operation introduces oxygen
- The Gas Wash Purge procedure removes the oxygen (1) in a very fast and efficient way and then refills back the chambers with Argon or Nitrogen gas (2)
- Compared with the traditional crucible protection by dilution, the consumption of gas is dramatically reduced and the alloys oxidation is minimized; moreover the crucible life is increased

### Melting


- Advanced Self Tuning thermoregulation (AST™) with exact temperature control of the melted alloys
- Two Set-Points available: Homogenization and Casting Temperature
- Set-up with multiple thermocouples available on request
- Medium frequency induction heating stirs the melted alloy and leads to a perfect homogeneity
- Pulse Stirring Management (PSM™) for an extremely low frequency stirring

### Injection and Compression

- When the stopper rod lifts up, it is very important to control the injection rate to avoid turbulences
- TVC has the unique feature to have the injection rate controllable and programmable (IRC™)
- The metal enters smoothly inside the mold (4). Then, after filling and during the solidification phase, a strong compression takes place on the tree (5)
- No turbulences in filling and high compression rate lead to a large reduction of shrinkage porosity phenomena

### Tree protection after casting

- Thanks to the double chamber concept, after the solidification phase, the flask cools down in a protective atmosphere while at the same time you can load your alloy in the melting chamber for the next melting.
- This operation will allow an overlapping of the casting cycles which will give you the ability to protect longer the tree before removing it without losing time and productivity

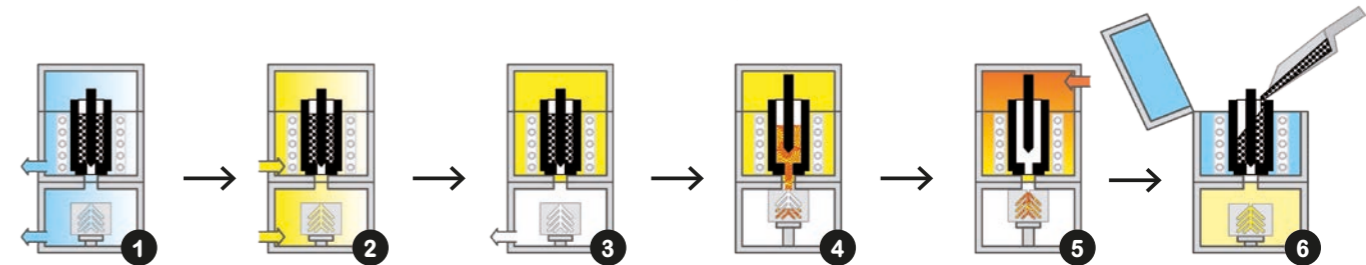

■ AIR □ VACUUM ■ GAS

Model	TVC12d	TVC25d-XL	TVC35d-XL	TVC45d-XL	TVC60d-XXL
Crucible Volume	380-500 cc	2-3 Liters	4 Liters	7 Liters	10 Liters
Crucible working capacity	2,5 Kg Cu, 800g Al, 500g Mg	18 Kg Cu, 10 Kg Steel 5 kg Al, 3 Kg Mg	24 Kg Cu, 16 Kg Steel 7 Kg Al, 4,5 Kg Mg	42 Kg Cu, 24 Kg Steel 13,5 Kg Al, 8 Kg Mg	60 Kg Cu, 45 Kg Steel 20 Kg Al, 10,5 Kg Mg
Flask max. diameter (mm)	● 150 / ○ 200	● 350 / ○ 450	● 350 / ○ 450	● 350 / ○ 450	600
Flask max. height (mm)	● 300 / ○ 400	600	600	600	800
Induction heating power	12 kW	25 kW	35 kW	45 kW	60 kW
Vacuum pump	Internal	Internal	Internal	Internal	Included
Pressure over vacuum	3 bar	1 bar	1 bar	1 bar	1 bar
Max. temperature	● 1250 °C / ○ 1600 °C	● 1250 °C / ○ 1600 °C	● 1250 °C / ○ 1600 °C	● 1250 °C / ○ 1600 °C	● 1250 °C / ○ 1600 °C
Granulation unit	○	○	○	○	○
Autotest with data report	●	●	●	●	●
Monitoring system for data acquisition	○	●	●	●	●
Flask check before casting	●	●	●	●	●
Vacuum leakage detector	●	●	●	●	●
Oxygen Analyzer	○	○	○	○	○
Industry 4.0 / Remote interface	○	○	○	○	○
Main alloys	● Copper (Cu), Brass, Bronze, Aluminium (Al), Gold (Au), Silver (Ag) and their alloys ○ Magnesium, Steel				
Provided ● / ○ Available on request					

# TCE | Vacuum centrifugal casting machine

Watch how it work



TCE are consistent, robust and easy to use vacuum centrifugal casting machines designed for small and medium casting laboratories. They can be manufactured in Class A or Class B.

TCE in Class B are particularly suited for Platinum, Palladium and Steel while TCE in Class A has been especially designed to cast Titanium, Inconel, and amorphous metals. All models can also melt nonferrous and precious metals.

The main difference between TCE in Class A and TCE in Class B is the degree of vacuum, leak-back rate and ppm of oxygen that are admitted during the process, that makes the TCE in Class A the best solution for casting Titanium-based alloys and intermetallic alloys.

Also the choice of the vacuum pumps station and the

induction power generator is different and it is chosen to get the maximum result in Titanium cast parts. Hence, TCE machines conceived in Class A are suitable for fields that require high quality control and low interstitial pick-up on the cast parts, like Aerospace, Medical and Automotive.

TCE in Class B can instead be used where the price of the machines is an important factor and where no particular restraint of oxygen content are involved.

Examples



Class B  
TCE10



Class A  
TCE12-Ti



Class A  
TCE50-HD-Ti



## Class B technical data

Model	TCE5	TCE10	TCE50
Crucible working capacity	500 g Pt   250 g Steel	1500 g Pt   1000 g Steel	8 kg Steel
Flask maximum diameter (mm)	Ø10	Ø80	Ø50
Flask maximum height (mm)	120	180	380
Induction power	8 kW	10 kW	50 kW
Max. spinning speed	500 rpm	450 rpm	300 rpm
Vacuum pump	External	External	External
Max. temperature	2000 °C	2000 °C	2000 °C
Monitoring system for data acquisition			●
Vacuum leakage detector	●	●	●
Oxygen Analyzer			●
Optical pyrometer	●	●	●
Rotating Thermocouple	○	○	○

Provided ● / ○ Available on request

## Class A technical data

Model	TCE8-Ti	TCE12-Ti	TCE40-HD-Ti	TCE30-Ti	TCE50-HD-Ti
Applications	Laboratory Machine		Production Machine		
Crucible working capacity	100 g Ti	400 g Ti	400 g Ti	1000 g Ti	1700 g Ti
Flask maximum diameter (mm)	Ø10	Ø80	Ø200	Ø50	Ø50
Flask maximum height (mm)	120	200	220	300	380
Induction power	8 kW	12 kW	40 kW	30 kW	50 kW
Max. spinning speed	500 rpm	350 rpm	600 rpm	300 rpm	300 rpm
Vacuum pump	External	External	External	External	External
Max. temperature	2000 °C	2000 °C	2000 °C	2000 °C	2000 °C
Fully water-cooled 24/7			●	●	●
Monitoring system for data acquisition	●	●	●	●	●
Vacuum leakage detector	●	●	●	●	●
Oxygen Analyzer	○	○	●	●	●
Industry 4.0 / Remote interface	●	●	●	●	●
Optical pyrometer	●	●	●	●	●
Rotating Thermocouple	○	○	○	○	○
Automatic Arm Home Position for Robot Load/Unload operations	○	○	●	○	●
Automatic Spin Trigger Algorithm	○	○	●	●	●

Provided ● / ○ Available on request

# TVM | Vacuum induction melting machine

Watch how it work



Topcast TVM are VIM furnaces conceived in a closed environment designed to melt and pour any kind of alloys under high level of vacuum.

In particular, TVM is the right choice when large batches and mass production is required.

TOPCAST develops this class of furnaces under customized specifications for what concerns crucible capacity, mold size and vacuum level.

In case you are interested in getting a quotation do not hesitate to send us your technical specifications.

Model TVM30



TVM furnace is conceptually divided into 5 sub-systems:




01.

Vacuum Melting Chamber with optional alloy feeding chamber and sampling probe



02.

Induction Generator



03.

Tilting Coil and Crucible Assembly



04.

Casting Mold in Graphite, Ceramic or Metal, also water cooled



05.

Vacuum Pumping Station

## TVM technical data

Model	TVM15	TVM30	TVM50
Crucible Volume	up to 500 cc	up to 1500 cc	up to 3000 cc
Induction Power	15kW	30kW	50kW
Ultimate vacuum level	Down to 5x10 <sup>-5</sup> mbar	Down to 5x10 <sup>-5</sup> mbar	Down to 5x10 <sup>-5</sup> mbar
Max. temperature	Up to 2000 °C	Up to 2000 °C	Up to 2000 °C
Industry 4.0 / Remote Interface	○	○	○
Fully water-cooled 24/7	●	●	●
Main alloys	Ni-based alloys, Reactive metals		

○ Available on request

# TIP | TCE | TVCd-L Vacuum furnaces for ingots, sheets and rods

Watch how it work



This family of furnaces are used to produce high quality semi-finished products, like ingots, sheets or rods, starting by raw materials melted by induction heating in vacuum or inert atmosphere.

While for TIP the ingots are obtained by melting pre-weighted grains in a graphite mold placed inside the vacuum chamber, for TVCd-L and TCE-L the feedstock is firstly melted and then poured in vacuum into a mold, that can be in copper, in graphite or

other materials. Pouring can be by gravity or differential pressure like in TVCd-L, or by centrifugal force like in TCE-L.

This family of products have been designed for those in need of casting small batches of different alloys, or when the profile of the ingots presents particular difficulties in shape (e.g.: thin and large).

Model  
TCE10-L



Model  
TIP12



Model  
TVC12d-L



## TIP technical data

Model	TIP12	TIP40	TIP100
Max ingot weight	500g Silver 1000g Gold	500g Silver 1000g Gold	400 oz Gold
Max ingot footprint	115,5 x 52,5 mm	115,5 x 52,5 mm	200 x 80 x 45 mm
Productivity	6 kilo-bars 24kt gold per hour or 24 x 100g ingots per hour	12 kilo-bars 24kt gold per hour or 48 x 100g ingots per hour	6 x 400 oz gold ingot per hour
Induction power	12 kW	40 kW	100 kW
Max. temperature	1200 °C	1200 °C	1200 °C

## TCE technical data


Model	TCE5	TCE10
Working capacity	500 g Pt 250 g Steel	1500 g Pt 1000 g Steel
Mold maximum diameter (mm)	∅∅10	∅∅80
Mold maximum height (mm)	110	180
Induction power	8 kW	10 kW
Max. spinning speed	500 rpm	350 rpm
Max. temperature	2000 °C	2000 °C

## TVC-L technical data

Model	TVC12d-L	TVC25d-L	TVC35d-L	TVC45d-L
Working capacity	500 g Mg 800 g Al 2.5 kg Bronze	3 kg Mg 5 kg Al 18 kg Bronze	4.5 kg Mg 7 kg Al 24 kg Bronze	8 kg Mg 13 kg Al 42 kg Bronze
Mold maximum diameter (mm)	● 150 / ○ 200	● 350 / ○ 450		
Mold maximum height (mm)	● 300 / ○ 400	600	600	600
Induction power	12kW	25 kW	35 kW	45 kW
Max. temperature	● 1250 °C / ○ 1600 °C			
Provided ● / ○ Available on request				

# TCC | Vacuum continuous casting machine

Watch how it work

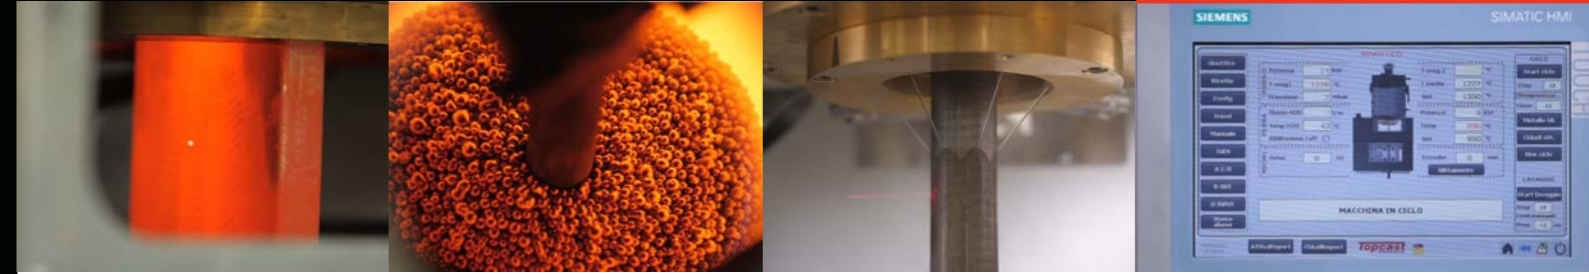

TCC Vacuum Continuous Casting machines have been designed with the most up-to-date technologies to give you semi-finished products with the best quality and in the shortest time.

TCC machines are equipped with Gas Wash Purge procedure which removes oxygen with the vacuum pump and fills back the melting chamber with inert gas, preventing the oxidation of the alloy in a very fast and efficient way.

Medium frequency induction heating stirs the melted alloy and leads to a perfect homogeneity, while the temperature is constantly monitored by a number of independent temperature controls.

As an option, it is possible to have an additional vacuum loading chamber, positioned on top of the cover with automatic crucible feeding mechanism, for continuous production.


During drawing, the temperature of the die is constantly monitored to obtain always the best density and quality in the semi-finished products. In addition, there are two independent temperature controls for preventing liquid metal leakage, one of them with an optical pyrometer aiming directly on the bar coming out from the die. The drawing unit can also be equipped with an extra induction generator, which allows to restart the cycle after the production shutdown.

Pulling unit is equipped with devices for automatic detection of slippage phenomena between the roller and the semi-finished product. Another specific device will also detects the end of the cycle, when the bar reaches its end.

To reduce the risk of oxidation during drawing, the semi-finished products are under a constant inert gas flushing as they come out from the die.

In addition, when a quicker cooling is required for hardness control, semi-finished products can be quenched by a series of water sprinkles aiming on their profile.

Hydraulic shears or sawing cutting on the run is available on request, with automatic and programmable measurement of the profile length.



Model  
TCC12



Model  
TCC15



## TCC technical data

	small			medium			large	
Model	TCC10 280cc	TCC12 380cc	TCC12 500cc	TCC15 1000cc	TCC15 1400cc	TCC20 2000cc	TCC35 4000cc	TCC45 7000cc
Induction power	10 kW	12 kW	12 kW	15 kW	15 kW	20 kW	35 kW	45 kW
Number of casting programs	100	100	100	unlimited	unlimited	unlimited	unlimited	unlimited
Crucible working capacity	1,5 kg Ag 1,4 kg Cu 3 kg Au	2 kg Ag 1,9 kg Cu 4 kg Au	3 kg Ag 2,5 kg Cu 5,5 kg Au	6 kg Ag 4,5 kg Cu 12 kg Au	8,5 kg Ag 7 kg Cu 16 kg Au	12 kg Ag 10 kg Cu 23 kg Au	25 kg Ag 20 kg Cu 46 kg Au	44 kg Ag 36 kg Cu 81 kg Au
Speed of the pulling unit	min. 10 mm/min max 999 mm/min			min. 10 mm/min max 999 mm/min			min. 10 mm/min max 999 mm/min	
Wire diameter*	min 3 - max 15 mm Ø			min 4 - max 30 mm Ø			min 5 - max 40 mm Ø	
Simultaneous wire casting*	max 2 wires			max 3 wires			max 6 wires	
Sheet size (LxW)*	max 60 x 8 mm			max 100 x 10 mm			max 130 x 20 mm	
Tube diameter*	min 10 - max 45 mm Ø			min 10 - max 85 mm Ø			min 12 - max 85 mm Ø	
Profile protection with protective gas flushing	●	●	●	●	●	●	●	●
Automatic crucible feeding unit	○	○	○	○	○	○	○	○
Extra induction generator				○	○	○	○	○
4 wheels pulling unit	●	●	●	●	●	●	●	●
Bending Unit	○	○	○	○	○	○	○	○
Cooling system by water sprinkles	●	●	●	○	○	○	○	○
Cutting unit on the run	○	○	○	○	○	○	○	○
Vacuum Pump	Built-in 4 m³/h			Built-in 25 m³/h			Built-in 25 m³/h	
Max. Temperature	1500°C			1500°C			1500°C	
Double thermocouple on crucible				○	○	○	○	○
Autotest with data report	●	●	●	●	●	●	●	●
Monitoring system for data acquisition	○	○	○	○	○	○	●	●
Vacuum leakage detector	●	●	●	●	●	●	●	●
Oxygen analyzer							○	○
Industry 4.0 / Remote interface	●	●	●	●	●	●	●	●
Main alloys	● Copper (Cu), Brass, Bronze, Aluminium (Al), Gold (Au), Silver (Ag) and their alloys / ○ PGM							
	Provided ● / ○ Available on request							
	* according to the alloy or process conditions, limits can be extended							



# TMF-R Induction tilting furnaces

TMF-R is a family of coreless induction melting furnaces capable of melting ferrous, non-ferrous, precious and PGM alloys. The crucible can be tilted for a more accurate and safer dosing. The driving mechanism can be by hand-wheel, electrical or hydraulic.

The frequency converter design approach uses parallel resonant typology adopting the latest and most advanced IGBTs modules available worldwide. Galvanic insulation between coil and power mains gives the maximum safety for the user, while digital technology makes our furnaces soundless, versatile and reliable. Fiber optics connections give the highest immunity to electrical noise also in harsh environment.

An accurate study of the coil guarantees a very high heating efficiency while medium frequency magnetic field stirs the molten metal and leads to high homogeneity of the alloys.

Temperature control can be chosen between IR optical pyrometer and thermocouple while the electronic board implements an advanced self-tuning thermoregulation algorithm with exact temperature stabilization.

Induction Generators can be provided with one or more melting stations using a power switch to drive one station or the other. Optionally, we offer a master-slave configuration featuring contemporary power-sharing between two or more power stations.

Maintenance of the furnace is very easy and it allows for rapid changing of the crucible and the safety refractory shell. Inert gas or gas-flame are foreseen to protect the melt from oxidation. A touch screen display is provided for a fast and user-friendly interface. A water cooling plant is needed to cool the induction heating coils and the power supply.

For more information and customized solution please contact us.

Watch how it work



Model  
TMF10-RH1



Model  
TMF15-RE2



Model  
TMF200-RI4



## Tilting unit VS. Metal working capacity

Model	RH1	RE1	RH2	RE2	RH3	RE3	RI4
Platinum	6		22		40		60
Steel	5		8		20		200
Brass	9		27		95		530
Silver	11		33		115		650
Gold	20		60		200		1200

RH = Hand-wheel tilting / RE = Electro-mechanical tilting / RI = Hydraulic tilting

Industry 4.0 / Remote interface upon request

## Induction power from 5 kW to 300 kW

Contact us for the best solution for you needs, like for example:

TMF60-RE3 = 60 kW induction power, 95 kg Brass capacity, electro-mechanical tilting with joystick control

# TMA-G Vacuum / Argon metal gas atomizer

Watch how it work



TOPCAST produces a family of gas-atomizers in a closed-coupled nozzle configuration designed to produce metal powders in spherical and regular shape. They find applications in many fields like industrial, chemical, electronics and Additive Manufacturing with SLM (Selective Laser Melting) or EBM (Electron Beam Melting) techniques. A gas-atomizer equipment complexity and related cost are very sensitive to the target alloy compositions.

The basic and simplest gas-atomizer configuration is the one used in the model TMA20g and TMA40g

In front of a limited investment budget, they present some limitations on the list of alloys they can produce, namely Au, Ag, Cu, Bi and Sn alloys. In case there is interest in producing Aluminium powders, an increase of complexity is needed, and the plant has to be built compliant with ATEX regulations.

This implies that the vacuum performance, leak-back rate, valves, filters and many other parts of the plant must be improved to meet demanding safety regulations. These plant modifications generate the atomizer model T-VIGA with higher features and higher price respect to the model TMAg.

Thanks to these improved features, T-VIGA configuration allows also to produce

stainless steel, Ni-based or MoCrCo powders, just to mention few examples.



On the other hand, if Refractory or Reactive metal powder, like Titanium, needs to be produced, we have to leave the T-VIGA configuration because of the ceramic and oxygen pick-up from the crucible and introducing the T-EIGA system.

T-EIGA uses a rod as a feed-stock with calibrated diameter and length, that is gradually fed into an induction coil at a controlled speed for metal melting and liquid dripping into the atomization chamber where the stream will impact the high-pressure gas coming from the close-coupled nozzle.

This way, there won't be contact zone between Titanium and any crucible, and the purity of the powder will meet the best standards.

Also in this case, the T-EIGA atomizer for Titanium alloys must be conceived compliant with ATEX regulations. It is finally possible to build a wide alloys range gas-atomizer, by assembling the T-VIGA and T-EIGA in a twin configuration, in which both share the same atomization tower, pipes, cyclone, heat-exchanger, filters and suction unit.

This complete configuration gives access to all the main alloys we can imagine for industrial, medical, automotive and aerospace applications.

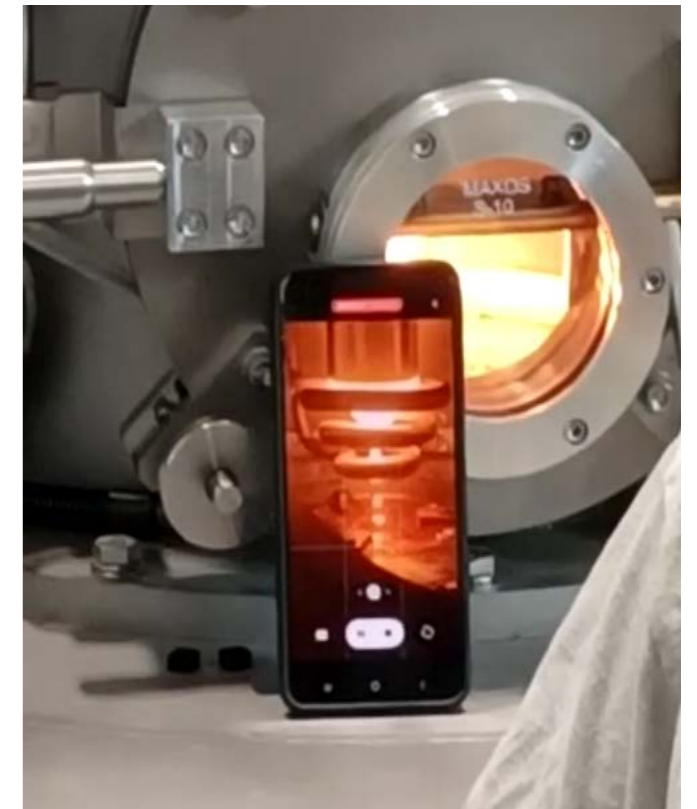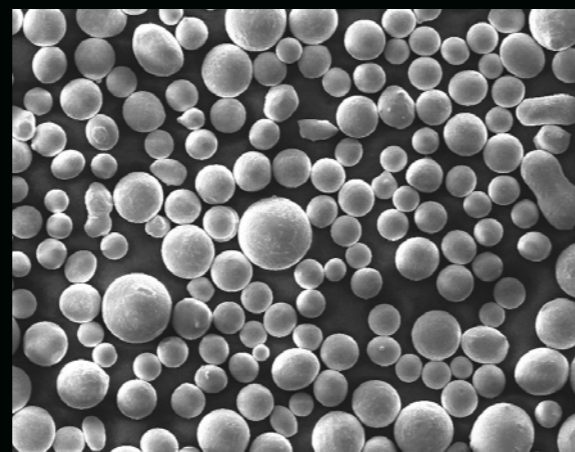

## TMA-G technical data

Model	TMA20g	TMA40g	T-VIGA-4.5	T-EIGA50-1000
Crucible working capacity	7,5 kg Bronze 9 kg Silver 17 kg Gold	35 kg Bronze 40 kg Silver	22 kg Steel 12 kg Aluminium	feedstock dimensions: Ø x 1000 mm
Atomizing gas	Nitrogen or Argon			
Crucible volume	1500 cc	7000 cc	4500 cc @ Steel 7000 cc @ Al	n.a.
Induction power	20 kW	40 kW	40 kW	60 kW
Atomizer Composition	Vacuum Melting Chamber, Vacuum Pump, Induction Unit, Atomization Chamber, Piping, Cyclone, Heat-Exchanger, Suction Unit, Exhaust			
Particle Size	Adjustable according to customer specifications			
Max. temperature	1550 °C	1550 °C	1750 °C	2500 °C
Process time	30 minutes	50 minutes	45 minutes	20 minutes
Autotest with data report	●	●	●	●
Monitoring system for data acquisition	●	●	●	●
Vacuum leakage detector	●	●	●	●
Oxygen Analyzer	○	○	○	○
Industry 4.0 / Remote interface	●	●	●	●
Main alloys	Au, Ag, Cu, Sn, Bi and their alloys		Al, Steel and Ni-based alloys	Reactive (Ti) and Refractory alloys

Provided ● / ○ Available on request

# TMA-W | Metal water atomizer


Watch how it work



TMA-W is a family of water atomizers designed to produce metal powders of irregular shape, to be used in industrial, chemical, soldering paste, resin filters, MIM and sintering applications.

The atomizer is based on an induction furnace, working under protective atmosphere, where the molten metal is poured and hit by a jet of high pressure water, producing fine and deoxidized powders.

Induction heating ensures a very good homogenization of the melt thanks to the action of magnetic stirring during the molten phase.

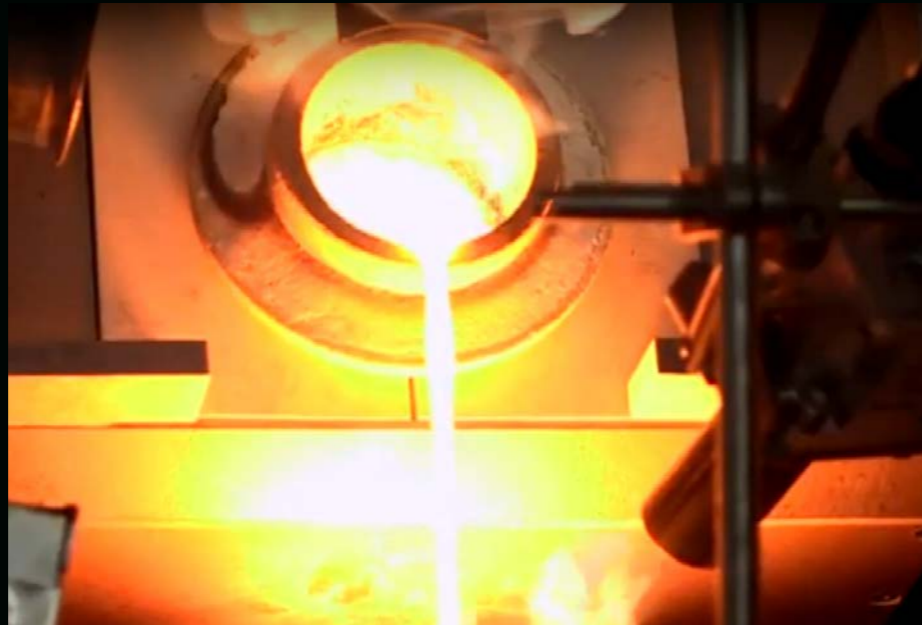

The tundish is equipped with an extra induction generator, which allows to restart the cycle in case of cycle interruption. Following the steps of melting and homogenization, the metal is poured through the tundish positioned on top of the atomization chamber.

Multiple streams of high pressure water are aimed and focused on the metal beam in order to ensure a fast alloy solidification in the form of fine powder.



Real-time process variables such as temperature, water pressure, induction power, and many others, are displayed in both numerical and graphical format on a monitoring system for an intuitive understanding of the working cycle.

The system can be operated manually or in fully

automatic mode, thanks to the programmability of the entire set of the process parameters via a user-friendly touch-screen interface. The monitoring system can be easily connected via Ethernet to the factory network.

**Metals and Field of Application**  
**Atomized Metals:**  
 Ferrous, Non-ferrous, Precious alloys and PGM.

**Field of Applications:**  
 industrial, chemical, soldering paste, resin filters, MIM and sintering applications.



## TMA-W technical data

Model	TMA20g	TMA40g
Crucible working capacity	up to 7,5 kg Bronze 9 kg Silver 17 kg Gold	up to 40 kg Bronze 50 kg Silver 90 kg Gold
Atomizing media	water	water
Crucible volume	up to 1500 cc	up to 7000 cc
Induction power	20 kW	40 kW
Maximum Pressure	up to 300 bar	up to 300 bar
Max. temperature	1600 °C	1600 °C
Process time	30 minutes	50 minutes
Autotest with data report	●	●
Monitoring system for data acquisition	○	○
Industry 4.0 / Remote interface	●	●
Main alloys	Gold (Au), Silver (Ag), Copper (Cu), Brass, Bronze, Aluminium (Al) and their alloys	

Provided ● / ○ Available on request

Watch how it work



# TMF-G Open system metal granulator

Topcast TMF-G induction melting plants are designed for metal grains production. The tilting crucible pours the metal in a multihole tundish which acts as a flow-breaker and from which the metal droplets fall into a water tank. All this is done with protection from oxidation by means of gas burners.

Additional modules perform the grains removal, drying, weighing and packing. TOPCAST develops ovens of this class under customer specifications, in particular as regards the type of metal, the capacity of the crucible, the required productivity.

Model  
TMF60-RH3-G



In this page, please find main details of some of our standard models; in case you're interested in receiving a dedicated quote, please send us your technical specifications.

## TMF-G technical data

Model	TMF25-RH2-G	TMF60-RH3-G	TMF200-R14-G
Crucible volume	up to 4 liters	up to 15 liters	up to 31 liters
Induction Power	25 kW	60 kW	200 kW
Industry 4.0 / Remote Interface	○	○	○
Main alloys	Steel, Cast Iron, Al, Bronze, Brass, PGM, Precious Metals according to the set-up		
	○ Available on request		

# TVCd-G | Closed system metal granulator

Watch how it work



Topcast TVCd-G furnaces are used to produce oxygen free and homogenous alloy grains, starting from raw material molten by induction heating in a protective atmosphere, obtained by inert gas purging cycles, and then poured into a water / alcohol tank passing through a multi-hollowed crucible that acts as flow breaker.

thanks to the stirring effect of the magnetic field which works while the metal is being melted in the crucible.

This avoids to transfer the process water to a back-up tank after pouring for then re-transfer back the same to the process tank after filtering the water from the grains.

Water in the tank is continuously circulating and it is cooled by a powerful chiller to keep the process variables under control and obtaining consistency and quality in the produced grains.

In the TVCd-GI series instead, the recovery of the grains is simplified and takes place through a metallic filter present in the granulation chamber.

Melting and pouring phases are protected by inert gas, which can be chosen between Argon, Nitrogen or Forming Gas.

The granulator is provided with a heat-exchanger, filters and water pump to separate the process water from the cooling water. After granulation, a two valves interlock system allows for grains recovery while the process water remains in the process chamber.

A highly automated plant can be provided for granulation, including automatic drying, sieving, dosing, weighting and grains packaging in a key-in-hands philosophy commissioning.

The induction generator is designed to allow the homogenization of the alloy

Model  
TVC35d-G



## TVCd-G technical data

Model	TVC12d-G	TVC20d-G	TVC25d-G	TVC35d-G	TVC45d-G	TVC20d-GI	TVC40d-GI
Crucible volume	500 cc	1.5 liters	2-3 liters	4 liters	7 liters	3 liters	7 liters
Crucible working capacity	3 kg Silver 7 kg Gold	9 kg Silver 17 kg Gold	18 kg Silver 30 kg Gold	24 kg Silver 56 kg Gold	42 kg Silver 100 kg Gold	18 kg Silver 30 kg Gold	42 kg Silver 100 kg Gold
Induction Power	12 kW	20 kW	25 kW	35 kW	45 kW	20 kW	40 kW
Inert Gas (Ar, N2, N2/H2 - forming gas)	●	●	●	●	●	●	●
Maximum temperature	● 1250°C / ○ 1600°C						
Autotest with data report	●	●	●	●	●	○	○
Monitoring system	●	●	●	●	●	○	○
Water tank check before pouring	●	●	●	●	●	●	●
Oxygen Analyzer	○	○	○	○	○	○	○
Industry 4.0 / Remote interface	●	●	●	●	●	○	○
Main alloys	Based on Gold (Au), Silver (Ag), Copper (Cu); Brass, Bronze						
	Provided ● / ○ Available on request						

# TGEN | Induction generator

TOPCAST designs frequency converters with cutting edge technology for induction heating application. The design approach uses both configurations: parallel and series resonant typology adopting the latest and most advanced IGBTs modules available worldwide.

In our generators, galvanic insulation between coil and power mains gives the maximum safety for the user, while digital technology makes our furnaces soundless, versatile and reliable.

Fiber optics connections give to our electronics the highest immunity to electrical noise also in harsh environment.

An accurate study of the coil guarantees a very high heating efficiency while medium frequency magnetic field stirs the molten metal and leads to high homogeneity of the alloys.



## TGEN technical data

Model	TGEN5	TGEN15	TGEN50	TGEN100	TGEN150	TGEN200
Induction power	5 kW	15 kW	50 kW	100 kW	150 kW	200 kW
Frequency range	5 – 150 kHz			1 - 20kHz		
Monitoring system for process and production data collection	○	○	○	○	○	○
Industry 4.0 / Remote interface	○	○	○	○	○	○

Provided ● / ○ Available on request

# FCC Electric furnaces

The burnout ovens series FCC are used to heat and fire the refractory investment and to melt and evacuate the wax in lost-wax casting technics.

The oven is evenly heated by electrical resistors and insulated by special ceramic panel with low thermal inertia and high thermal resistance.

The structure can be easily removed for heating elements replacement and a special steel basin for wax collection is placed under the flasks.

Cooling of the chamber is fast thanks to the absence of refractory bricks.

A sliding tray filled of water, placed below the oven, allows for lost wax recovery.

A cycle programmer easy to use allows various burnout programs for different needs. The flask loading door is on the top, and an extraction trolley allows easy handling of the flasks through a crane (for model FCC-TE32 and FCC-TE50 only).

Watch how it work



Model FCC-T6



Model FCC-TE32



## FCC technical data

Model	FCC-T6	FCC-T10	FCC-T13	FCC-T22	FCC-T32	FCC-T50
Muffle internal dimensions (mm)	400x400x600H	450x450x620H	500x650x750H	600x850x950H	800x1340x950H	800x2080x1200H
Power	6 kW	10 kW	13 kW	22 kW	32 kW	50 kW
Max. temperature	1080°C					
Extraction trolley	○	○	○	○	●	●
Industry 4.0 / remote interface	○	○	○	○	○	○

Provided ● / ○ Available on request

# **Topcast** *Engineering*

---

Via Leopoldo di Toscana, 9-11  
52048 Monte San Savino (AR) ITALY

---

+39 0575 441341  
info@topcast.it

---

[www.topcast.it](http://www.topcast.it)